

DOUBLE 3528 FLEXIBLE LED STRIP LIGHT

Ultra thin, high output LED strip for dry locations with roll lengths up to 25M (82'). Can be paired with single color controllers and dimmer.

Features

- Highest quality 3528 SMD LEDs
- 12V DC input
- Excellent color output, CRI >90
- 950 lumens per meter
- Maximum Length: 25M (82')
- Cuttable every 25mm
- Dimmable with our dimmable low voltage power supplies

Applications

Accent | Display | Cove | Cabinet


Installation

Double-sided 3M tape on the back



Voltage	12V DC
Wattage	9.6W/M (2.9W/FT)
Roll Length	5M (16.4') / 25M (82')
Cut Distance	3 LEDs - 25mm (1")
# of LEDs	120 LEDs/M (3.28')
Color Temp	3000K / 5000K
CRI	>90
Lumens	950/M (290/FT)
Beam Degree	120°
Dimmable	Yes
Lifespan	+65,000 hours
Warranty	5-year

Dimensions

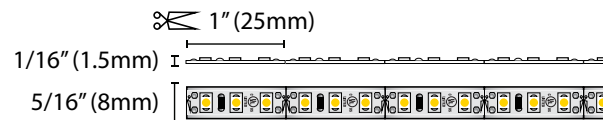





Ordering Codes

Product	Chip & Length	Voltage	LEDs/M	Color Temperature
FLI		12	120	
FLI : Indoor	1 : 3528 B : 5M (16.5') D : 25M (82')	12 : 12 volt	120 : 120 LEDs	3K : 3000K 5K : 5000K

Solderless Connectors

Solderless connectors are designed to provide a simple and quick connection for projects. Suitable for indoor applications.

Image	Code	Product	Description
	SC1-3528-120	Seamless Connector	2 wire. Width: 1/2" (13mm). Application: Add length.
	SC2-3528-120	Connector on one End	2 wire. Width: 1/2" (13mm). Applications: Cut strip to power.
	SC3-3528-120	Connector on both Ends	2 wire. Width: 1/2" (13mm). Applications: Corners.
	SC4-3528-120	L-Connector	2 wire. Width: 1/2" (13mm). Applications: For corners.